



Ultramix

Capacity

5 - 2000 gallons.

Materials of Construction

All wetted parts in 316L stainless steel. Special material on request.

Motor Specification

TEFC, washdown duty and explosion proof motors are available as standard.

Mounting


Stainless steel flange fitting is available as standard.

Sealing

V-ring shaft seal as standard.

Cleaning

Clean-In-Place (CIP) design. Simple, easy-to-clean construction.

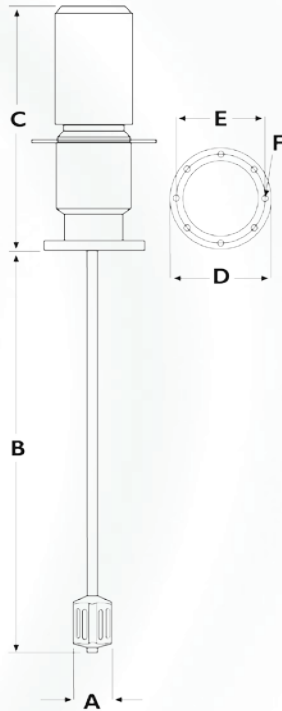

Model	HP	RPM	A	B	C	Flange	D	E	F
U1	1	3600	1 $\frac{7}{8}$	22	19	3	7 $\frac{1}{2}$	6	4 x $\frac{3}{4}$
U2	3	3600	2 $\frac{1}{4}$	26	22	4	9	7 $\frac{1}{2}$	8 x $\frac{3}{4}$
U4	5	3600	2 $\frac{3}{4}$	41	24	4	9	7 $\frac{1}{2}$	8 x $\frac{3}{4}$
U6	7.5	3600	3 $\frac{1}{4}$	55	33	6	11	9 $\frac{1}{2}$	8 x $\frac{7}{8}$
U7	10	3600	3 $\frac{1}{2}$	72	33	6	11	9 $\frac{1}{2}$	8 x $\frac{7}{8}$
U9	10	1800	4 $\frac{1}{2}$	72	33	6	11	9 $\frac{1}{2}$	8 x $\frac{7}{8}$
U10	25	3600	4 $\frac{1}{2}$	72	42	8	13 $\frac{1}{2}$	11 $\frac{3}{4}$	8 x $\frac{7}{8}$
U11	20	1800	5	72	41	8	13 $\frac{1}{2}$	11 $\frac{3}{4}$	8 x $\frac{7}{8}$
U15	25	1800	5 $\frac{7}{8}$	72	45	10	13 $\frac{1}{2}$	11 $\frac{3}{4}$	8 x $\frac{7}{8}$

The dimensions shown are approximate only and certified diagrams should be used for installation purposes. Silverson reserves the right to change dimensions and specifications without notice.